


ATC-30 Spec sheet

Rated Power (rms)	30W	
Impedance	333Ω, 666Ω, 1333Ω, 2666Ω, OFF, 8Ω	333Ω, 666Ω, 1333Ω, 2666Ω, OFF, 20Ω
Power Taps @ 100V	30W, 15W, 7.5W, 3.75W, OFF, 8Ω	30W, 15W, 7.5W, 3.75W, OFF, 20Ω
Power Taps @ 70.7V	15W, 7.5W, 3.75W, 1.87W, OFF, 8Ω	15W, 7.5W, 3.75W, 1.87W, OFF, 20Ω
SPL (1W/1m)	110dB	
Max. SPL (30W/1m)	125dB	
Freq. Range (-10dB)	280 Hz – 7.6KHz	
Freq. Range (-20dB)	260 Hz – 12.1KHz	
Dispersion 1 KHz/4 KHz	100° / 30°	
Water Protection	IEC529 IP66	
Material	High impact ABS	
Colour/Finish	Light Grey (RAL 7035)	
Dimensions	238 (9.37) Dia. * 302 (11.89) Length mm (In.)	
Weight	2.3kgs (5.07lbs.)	
Mounting	U Type Stainless Steel Bracket	

Frequency Response

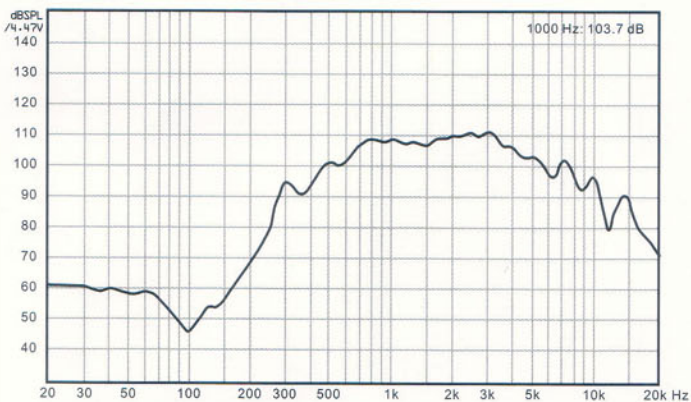

Polar Plot

